



## PRISMPACK® V

ROBUST DESIGN CHARACTERIZES PRISMPACK LUMINAIRES, FROM CORROSION RESISTANT MATERIALS AND COATINGS TO LONG LASTING BOROSILICATE PRISMATIC GLASS REFLECTORS. PRISMPACK LUMINAIRES ARE AVAILABLE IN A CHOICE OF ANODIZED ALUMINUM COVERED PRISMATIC GLASS REFLECTORS, EFFICIENTLY CONTROLLING LIGHT FOR EXCEPTIONAL VISIBILITY.





## FEATURES AND BENEFITS

- ☐ ISD SuperGlass® technology for optimum efficiency and photometric stability
- ☐ Tool-less mechanism with open prismatic glass optic simplifies installation and maintenance
- ☐ Glass reflector with permanently spun-on and sealed anodized aluminum cover for more down light and longevity of product

## TYPICAL APPLICATIONS


- ☐ Manufacturing Areas
- ☐ Assembly Areas
- ☐ Warehouses
- ☐ Hangars
- ☐ Mills
- ☐ Convention Centers
- ☐ Gymnasiums



## APPLICATIONS

PRISMPACK LUMINAIRES ARE THE PERFECT FIXTURES FOR A VARIETY OF HEAVY-DUTY HIGH BAY APPLICATIONS INCLUDING INDUSTRIAL, COMMERCIAL AND EDUCATIONAL FACILITIES.

AVAILABLE IN A WIDE RANGE OF HID LAMPS AND BALLASTS, PRISMPACK LUMINAIRES DELIVER REQUIRED LIGHTING LEVELS IN AN ENERGY EFFICIENT MANNER.

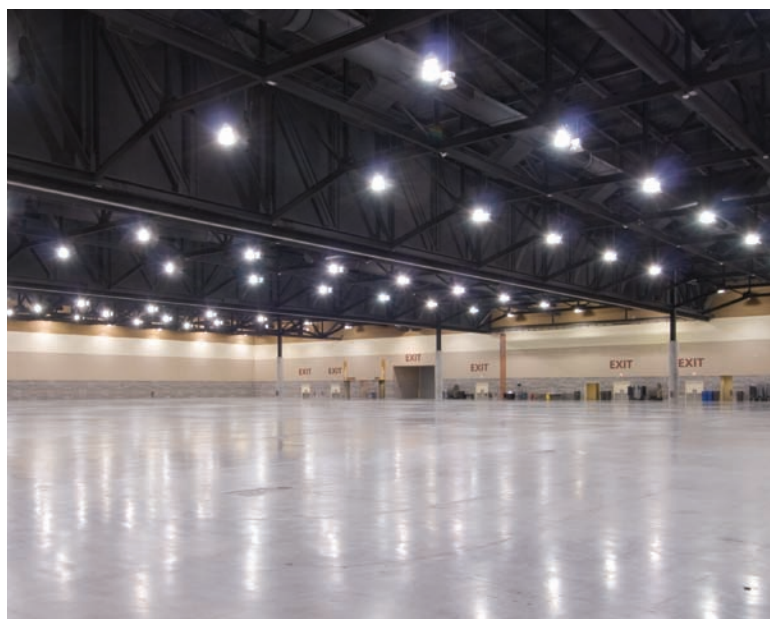

### Manufacturing Areas

The Prismpack luminaires are the perfect fixture for a variety of heavy duty high bay industrial applications. Unlike plain aluminum or plastic reflectors, borosilicate glass reflectors are not subject to permanent deterioration caused by industrial environments and do not attract dust or dirt particles. This product is available for applications requiring up to 65°C rating.

### Warehouses

The overall efficient performance of Prismpack luminaires can result in fewer fixtures providing the designed illumination levels. Fewer fixtures reduce installation and operating costs.

### Convention Centers

The Prismpack luminaire provides maximum efficiency for flexibility of design. The unique prismatic glass reflector system coupled with a wide selection of HID lamps and wattages means an extensive choice of distributions are available to tailor your lighting design to the application.

### Schools and Gymnasiums

Because these facilities host many types of events and often expose the luminaire to potential damage from being hit, luminaires offering flexible light levels with great uniformity while remaining rugged and durable are required. Prismpack luminaires are ideal for school gymnasiums, enhancing the visual environment while providing energy efficiency, low maintenance and bottom line savings required by today's educational institutions.


# INDUSTRIAL





# SPORTS AND COMMERCIAL



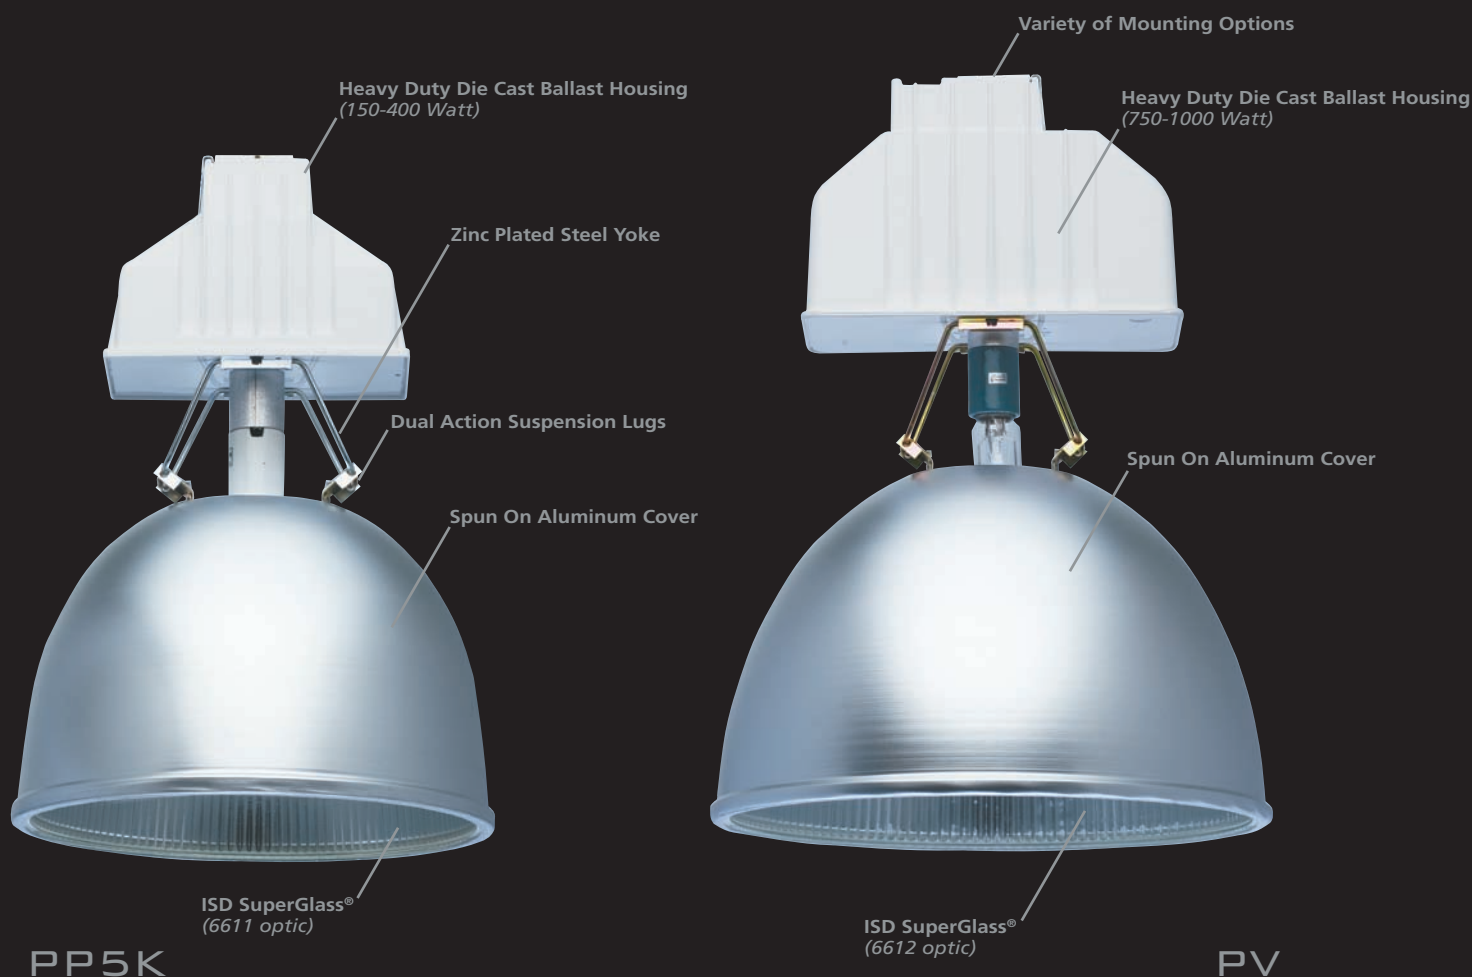


Heavy Duty Die Cast Ballast Housing is available in two sizes, supports optics and is pretreated and coated with electro-statically deposited thermoset polyester white powder paint.



Zinc Plated Steel Yoke quickly secures reflector to housing for long life and easy installation.

Dual Action Suspension Lugs are non-adjustable, easily installed, properly positions and sets the reflector in place for designed photometrics.

Variety of Mounting Options available in quick disconnect, pendant and thru-wiring power hanger mountings.



Spun On Aluminum Cover concentrates the majority of light downward.

ISD SuperGlass® provides high efficiency coupled with great uniformity, resulting in the best performance in the industry. Available in wide and narrow distributions. Open prismatic borosilicate glass reflector provides a low electrostatic charge and minimizes dirt build-up, while providing longevity and the ultimate in sustainability.




# ORDERING INFORMATION


## DIMENSIONAL DETAILS




**PP5K**  
(6611/6631 optic, covered)  
**Maximum Weight:** 32.9 kg (72.7 lbs.)




**PP5K**  
(6612 optic, covered)  
**Maximum Weight:** 19.8 kg (43.7 lbs.)

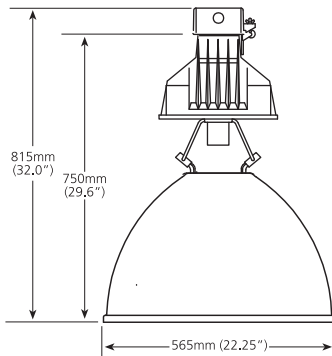

**PV**  
(6611/6631 optic, covered)  
**Maximum Weight:** 27.5 kg (60.7 lbs)



**PV**  
(6612 optic, covered)  
**Maximum Weight:** 36.7 kg (81 lbs)

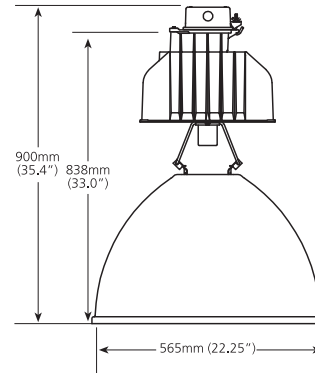

## PERFORMANCE SPECIFICATIONS

Complete luminaire shall be Holophane catalog number \_\_\_\_\_. The luminaire shall consist of two sub-assemblies: ballast assembly containing the electrical components, mounting hardware and reflector attachment lugs; and optical assembly. It shall have passed .5g accelerated fatigue vibration test, high ambient temperature test of \_\_\_\_\_ and provide for lamp starting in -30°C (MH) or -40°C (HPS) ambients.

The complete luminaire shall be listed by Underwriter Laboratories, Inc. as suitable for use in damp location ambients of up to 55°C as standard, 65°C optional, and CUL listed.

The cast aluminum ballast housing shall be protected by a phosphate pretreatment followed by a sprayed on and cured polyester powder paint. This finish is tested in accordance with ASTM standards for hardness, humidity, impact and salt spray resistance to prevent cross hatch creep, fading, cracking, and other corrosion related deterioration. All hardware shall be zinc plated steel for corrosion protection.


The pre-wired, porcelain lamp holder with corrosion resistant, nickel plated lamp grip screw shell, shall be factory set for optimum distribution. The zinc plated steel, reflector attachment yoke shall have swingover lugs and provision for full ventilation and optional safety chain. No tools shall be required to attach or detach the reflector from the housing.

### Optical Assembly


Glass reflector shall be Endural® prismatic borosilicate glass with a minimum wall thickness of 3mm (.13"). Reflector shall have a permanently spun-on and sealed anodized aluminum cover. The smooth inner glass surface shall not deteriorate in normal industrial atmospheres and shall return to original efficiency after cleaning.

## DISTRIBUTIONS

### 6611, Wide Optic

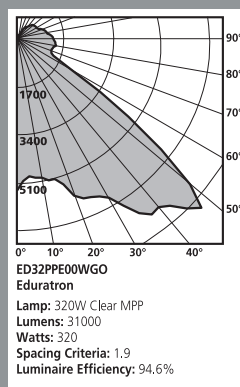

### 6612, Narrow Optic

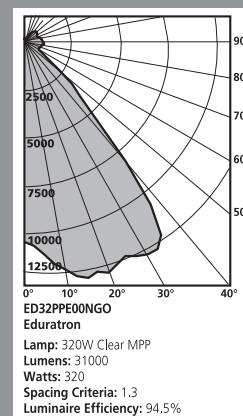

## PREFERRED SELECTIONS:

## Most Frequently Ordered Catalog Numbers

| PP5K       | 250PP                                     | 12             | Q           | Q11                      | F1      | PF-291      |
|------------|-------------------------------------------|----------------|-------------|--------------------------|---------|-------------|
| 1          | 2                                         | 3              | 4           | 5                        | 6       | 7           |
| LUMINAIRE  | WATTAGE                                   | VOLTAGE        | MOUNTING    | OPTICS                   | OPTIONS | ACCESSORIES |
| PRSL<br>PS | 250PP<br>320PP<br>350PP<br>400PP<br>750HP | 12<br>MA<br>MD | N<br>P<br>Q | L11<br>Q11<br>Q12<br>Y12 | F1      | PF-291      |

## CATALOG NUMBERS FOR ENTIRE PRODUCT OFFERING

(Pricing and lead times may be affected)



**STEP 1: LUMINAIRE**

**PP5K** Prism-pack, 150 - 400 watt  
**PV** Prism-pack, 750 - 1000 watt

**PP5K**  
Maximum Weight: 11.8 kg (26 lbs.)

**PV**  
Maximum Weight: 24.5 kg (54 lbs.)

**STEP 2: SOURCE AND WATTAGE**

**PP5K**  
**HIGH PRESSURE SODIUM**  
**15AHP** 150W/55V HPS  
**250HP** 250W HPS  
**400HP** 400W HPS  
**Energy Saving**  
**25LHP** 250W HPS  
**40LHP** 400W HPS  
**METAL HALIDE**  
**175MP**<sup>1</sup> 175W MH, protected  
**250MP**<sup>1</sup> 250W MH, protected  
**400MP**<sup>1</sup> 400W MH, protected  
**Energy Saving**  
**25LMP**<sup>1</sup> 250W MH, protected  
**40LMP**<sup>1</sup> 400W MH, protected  
**PULSE START METAL HALIDE**  
**250PP**<sup>2</sup> 250W PMH, protected  
**320PP**<sup>2</sup> 320W PMH, protected  
**350PP**<sup>2</sup> 350W PMH, protected  
**400PP**<sup>2</sup> 400W PMH, protected

<sup>1</sup> Not available for shipment in the US after Dec. 31, 2008 due to EISA legislation  
<sup>2</sup> (E) Meets US Federal EISA legislation

**STEP 2: SOURCE (CONTINUED)**

**Energy Saving**  
**25LPP**<sup>1</sup> 250W PMH, protected  
**35LPP**<sup>1</sup> 350W PMH, protected  
**40LPP**<sup>1</sup> 400W PMH, protected

**PV**  
**HIGH PRESSURE SODIUM**  
**750HP**<sup>2</sup> 750W HPS  
**CP1HP** 1000W HPS, compact  
**C10HP** 1000W HPS  
**METAL HALIDE**  
**C10MP** 1000W MH, protected

<sup>1</sup> (E) Meets US Federal EISA legislation  
<sup>2</sup> Not available with multi-voltage

**STEP 3: VOLTAGE**

**08**<sup>1</sup> 208V  
**12** 120V  
**20** 208V  
**24** 240V  
**27** 277V  
**34**<sup>2</sup> 347V  
**40**<sup>1</sup> 240V  
**48** 480V

**Multi-voltage**  
**MA** Prewired for 120V  
**MB** Prewired for 208V  
**MC** Prewired for 240V  
**MD** Prewired for 277V  
**MT** Multi-voltage  
**VT**<sup>1</sup> Vari-tap for PP5K with 120, 277, 347V

<sup>1</sup> Must be handled through TSG  
<sup>2</sup> Not available with 150DMH, 150MP, 750HP

**STEP 4: MOUNTING**

**P** Pendant mount, .75" NPT conduit  
**Q**<sup>1</sup> Quick disconnect power hanger  
**N**<sup>2</sup> No quick disconnect power hanger

<sup>1</sup> Not available with "CDP", "PCHB", or "PF"  
<sup>2</sup> CP10HP available with N mounting but without thru-wiring

**STEP 5: OPTICS**  
 Select catalog number from the chart

**6611**  
Maximum Weight: 7.57 kg (16.7 lbs.)

**6612**  
Maximum Weight: 12.26 kg (27 lbs.)

| Spacing to<br>Mtg. Ht. Ratio | Lamp Source and Wattage |          |      |       |
|------------------------------|-------------------------|----------|------|-------|
|                              | 150W                    | 250-400W | 750W | 1000W |
| 0.7:1 - 1.2:1                | L12                     | W12      | F12  |       |
| 1.2:1 - 2.2:1                | Q11                     | L11      | W11  | F11   |

| Spacing to<br>Mtg. Ht. Ratio | Lamp Source and Wattage |          |          |            |
|------------------------------|-------------------------|----------|----------|------------|
|                              | 150W                    | 250-320W | 250-350W | 750W 1000W |
| 0.7:1 - 1.2:1                | Q12                     | N12      | H12      | Y12        |
| 1.2:1 - 2.2:1                | Q11                     | Q 11     | N11      | H11 Y11    |

**STEP 6: OPTIONS**  
**Factory Installed.**  
 See page 85 for a complete list of options and product availability

**STEP 7: ACCESSORIES**  
**Ships Separately.**  
 See page 86 for a complete list of accessories and product availability

# MOUNTING OPTIONS



**PD - Pendant**  
The separable DN20NPT (.75") threaded conduit mounting plate with integral set screw shall include a quick install slide on attachment. The housing shall be balanced and suitable for support from hooks or loops. A slide on wireway cover shall enclose the wiring chamber which is suitable for 90° or 105°C building wire.



**ND - Non-Disconnect Pendant and Throughway Wiring**  
The die cast aluminum pendant and/or throughway integral wiring box shall contain provisions for both DN20NPT (.75") threaded mounting conduit and direct ceiling mounting. It shall contain an integral hinge connecting the die cast aluminum pin on the housing to support the luminaire while electrical connections are made. The mounting shall have the same corrosion resistant finish as the housing. The mounting shall consist of 2 cast knockouts, 4 ceiling mount drill points, DN20NPT (.75") conduit threaded top opening, and be UL/CUL listed and CUL certified for up to five #10 AWG conductors for through wiring. The housing shall swing up and connect to the ND box by latching the captive J bolt and wing nut without use of tools.


# OPTIONS AND ACCESSORIES



**Auxiliary Lighting**  
Emergency and standby options provide sufficient lighting during failure or interruptions of the normal power supply.



**Cords, Plugs and Chains**  
Cord and NEMA twist-off plugs for use in areas where support and electrical receptacle is supplied. Most cords and plugs are factory installed and are used typically with hooks or loops (ordered separately). 'X' denotes cord length. 3' is standard and lengths longer than 6' are handled through TSG.

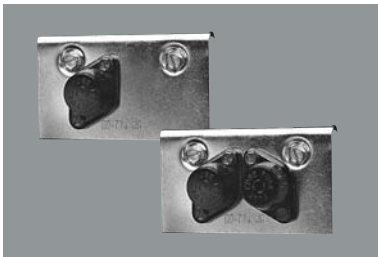

**Fusing**  
Accessible fuse protects and isolates luminaire from circuit. Must specify voltage.

| NEMA LOCKING CONFIGURATIONS |          |            |                    |                                                                                       |
|-----------------------------|----------|------------|--------------------|---------------------------------------------------------------------------------------|
| Catalog Designation         | Ampacity | Voltage    | NEMA Configuration | Illustration                                                                          |
| CDP-L5-15-X                 | 15A      | 120V       | L5 - 15            |  |
| CDP-L6-15-X                 | 15A      | 208V, 240V | L6 - 15            |  |
| CDP-L7-15-X                 | 15A      | 277V       | L7 - 15            |  |
| CDP-L24-20-X                | 20A      | 347V       | L24 - 20           |  |
| CDP-L8-20-X                 | 20A      | 480V       | L8 - 20            |  |





### QD - Quick-Disconnect Pendant and Throughway Wiring

The die cast aluminum pendant and/or throughway quick disconnect wiring box shall contain provisions for both DN20NPT (.75") threaded conduit mounting and direct ceiling mounting. It shall contain an integral hinge connecting the die cast aluminum pin on the housing to allow the luminaire to hang free with electrical disconnect. The mounting shall have the same corrosion resistant finish as the housing. The mounting shall consist of 2 cast knockouts, 4 ceiling mount drill points, DN20NPT (.75") conduit threaded top opening, and be UL listed for up to five #10 AWG conductors for through wiring.

The housing shall swing up and connect to the QD box by latching the captive J bolt and wing nut without use of tools. A dead front receptacle shall be mounted inside the QD box which will make an electrical connection with the pre-wired plug in the housing.


The receptacle shall be UL listed for connection to lighting branch circuits which can then be energized before the housing is attached. The grounding connection shall be the first to make contact and the last to disconnect.

It shall be CUL certified and listed per UL-1059 (Panel Board Accessory) and UL-98 (Enclosed and Dead Front Switches) permitting the luminaire to be disconnected while under load.

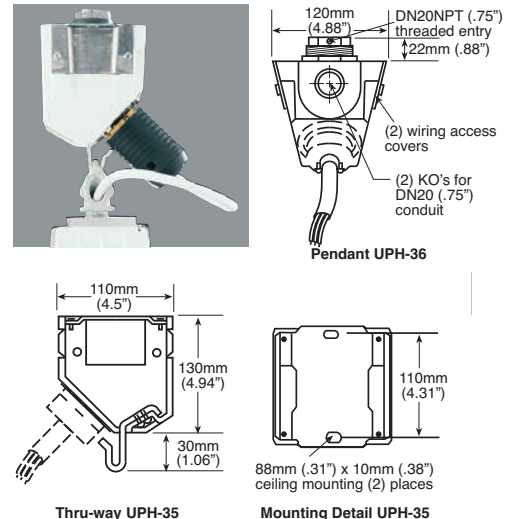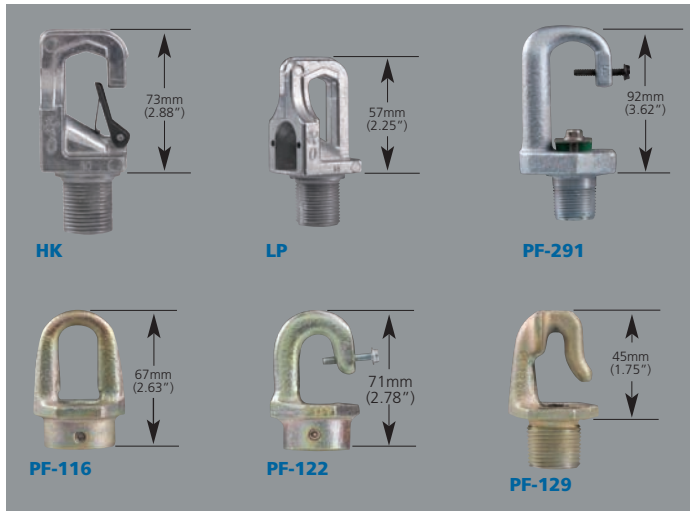

### Hooks, Loops, and Power Hooks

All hooks, loops, and power hook and cords assemblies are for use in areas where support and electrical receptacle is supplied. Mounting hooks and loops shall be lubricating cast aluminum or malleable iron and protected against corrosion. Supplied either factory installed or shipped separately.



### Wire Guards

All wire guards are made of #10 gauge zinc finished wire form and offer a means to protect luminaires from minor impact. Wire guards are sold as accessories and shipped separately.

|                        |                                                                                                                                                                                                                                                                                        | Prism-pack V                                                                        |                                                                                       | Prism-pack V Enclosed                                                                 |                                                                                       |                                                                                       |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                        |                                                                                                                                                                                                                                                                                        |    |     |    |    |    |
| Luminaire              |                                                                                                                                                                                                                                                                                        | PP5K                                                                                | PV                                                                                    | KE                                                                                    | EK                                                                                    | EGN                                                                                   |
| <b>HID Ballast</b>     | Standard HID ballast available in 150-400 watt high pressure sodium, metal halide and pulse start metal halide                                                                                                                                                                         | <b>S</b>                                                                            | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              |
| <b>Housing</b>         | Heavy duty, cast aluminum ballast housing.                                                                                                                                                                                                                                             | <b>S</b>                                                                            | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              |
| <b>Electrical</b>      | UL/CUL labeled for damp locations, suitable for ambient temperatures up to 40°C.                                                                                                                                                                                                       | <b>S</b>                                                                            | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              |
| <b>Mounting</b>        | A variety of mountings including pendant, quick disconnect, and thru-way wiring, as well as Holoflex with a 5' or 6' cord drop                                                                                                                                                         | <b>S</b>                                                                            | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              |
| <b>Finish</b>          | Standard finish is white for ballast housing                                                                                                                                                                                                                                           | <b>S</b>                                                                            | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              | <b>S</b>                                                                              |
| <b>08214-X</b>         | Safety chain (3' is standard)                                                                                                                                                                                                                                                          |    |    | —                                                                                     | —                                                                                     | —                                                                                     |
| <b>65</b>              | 65°C Ambient listing for "40LHP", "40LMP", "40LPP", "C10HP" and "C10MP" only                                                                                                                                                                                                           |    |    | —                                                                                     |    | —                                                                                     |
| <b>A35</b>             | AERS® - Automatic Energy Reduction System 35% low mode operation, low voltage AC control. Available with 250HP, 25LHP, 400HP, and 40LHP. Not available with "EM", "ISA", "ISR", "Q", "CDP", "EM" or "PHCB".                                                                            |    | —                                                                                     | —                                                                                     | —                                                                                     | —                                                                                     |
| <b>A50</b>             | AERS® - Automatic Energy Reduction System 50% low mode operation, low voltage AC control. Available 15AHP, 175MP, 250HP, 25LHP, 250MP, 25LMP, 25LPP, 320PP, 350PM, 35LPM, 400HP, 40LHP, 400MH, 40LMH, 400PM, 40LPM. Not available with "EM", "ISA", "ISR", "Q", "CDP", "EM" or "PHCB". |    | —                                                                                     | —                                                                                     | —                                                                                     | —                                                                                     |
| <b>CD-X</b>            | Cord only attached as an option to the electrical assembly. Insert "3", "4", "5" or "6" for "X" in catalog number. Not available with "MT". "PE" is not available with "4" and "5" lengths. For lengths longer than 6' handle through TSG                                              |    |    |    |    |    |
| <b>CDP-L5-15-X-PT</b>  | 120V NEMA 3', 3 conductor cord and plug. Attached as an option to the electrical assembly. Order "PF" also. X = length of cord in feet. 3' is standard.                                                                                                                                |  |  | —                                                                                     |  | —                                                                                     |
| <b>CDP-L6-15-X-PT</b>  | 208 and 240V NEMA 3', 3 conductor cord and plug. Attached as an option to the electrical assembly. Order "PF" also. X = length of cord in feet. 3' is standard.                                                                                                                        |  |  | —                                                                                     |  | —                                                                                     |
| <b>CDP-L7-15-X-PT</b>  | 277V NEMA 3', 3 conductor cord and plug. Attached as an option to the electrical assembly. Order "PF" also. X = length of cord in feet. 3' is standard.                                                                                                                                |  |  | —                                                                                     |  | —                                                                                     |
| <b>CDP-L8-20-X-PT</b>  | 347V NEMA 3', 3 conductor cord and plug. Attached as an option to the electrical assembly. Order "PF" also. X = length of cord in feet. 3' is standard.                                                                                                                                |  |  | —                                                                                     |  | —                                                                                     |
| <b>CDP-L24-20-X-PT</b> | 480V NEMA 3', 3 conductor cord and plug. Attached as an option to the electrical assembly. Order "PF" also. X = length of cord in feet. 3' is standard.                                                                                                                                |  |  | —                                                                                     |  | —                                                                                     |
| <b>CR</b>              | Corrosion resistant finish (handled through TSG)                                                                                                                                                                                                                                       | —                                                                                   |  | —                                                                                     | —                                                                                     | —                                                                                     |
| <b>D35</b>             | AERS® - Automatic Energy Reduction System 35% low mode operation, low voltage DC control. Available with 250HP, 25LHP, 400HP, and 40LHP. Not available with "EM", "ISA" or "ISR".                                                                                                      |  | —                                                                                     | —                                                                                     | —                                                                                     | —                                                                                     |
| <b>D50</b>             | AERS® - Automatic Energy Reduction System 50% low mode operation, low voltage DC control. Available 15AHP, 175MP, 250HP, 25LHP, 250MP, 25LMP, 25LPP, 320PP, 350PM, 35LPM, 400HP, 40LHP, 400MH, 40LMH, 400PM, 40LPM. Not available with "EM", "ISA" or "ISR".                           |  | —                                                                                     | —                                                                                     | —                                                                                     | —                                                                                     |
| <b>EM</b>              | Standby lighting: 120V tungsten halogen bayonet base lamp and lamp socket to provide lighting during times of temporary power interruption until the HID lamp is cool enough to restrike                                                                                               |  |  |  |  |  |
| <b>ER</b>              | Emergency circuit lighting: 120V tungsten halogen bayonet base lamp and lamp sockets separate backup (emergency) power circuit that provides sufficient lighting during failure of the normal power supply                                                                             |  |  |  |  | —                                                                                     |
| <b>F1</b>              | Single fuse assembly. (LINE-to-LINE 240/277 volt)                                                                                                                                                                                                                                      |  |  |  |  |  |
| <b>F2</b>              | Double fuse assembly. (LINE-to-COM 208/240 volt)                                                                                                                                                                                                                                       |  |  |  |  |  |
| <b>H</b>               | HALT® Automatic lamp timeout                                                                                                                                                                                                                                                           |  |  | —                                                                                     |  | —                                                                                     |
| <b>HFW</b>             | Holoflex® flexible wiring system - A modular single or three phase wiring system that provides flexibility in layout, quick installation and lower installed cost. Available with 277V only (208 and 240V are available through TSG)                                                   | —                                                                                   |  | —                                                                                     |  | —                                                                                     |
| <b>HK</b>              | Safety hook, (.75") male. (Order HK-PT for ELE)                                                                                                                                                                                                                                        |  |  |  |  |  |
| <b>ISA</b>             | Individually Sensored High Bay, aisle way sensor. Not available with "MT", or with mogul base units (070HP, 170DHP, 15AHP, 175MH/PM)                                                                                                                                                   |  | —                                                                                     |  | —                                                                                     | —                                                                                     |
| <b>ISR</b>             | Individually Sensored High Bay, 360° round sensor. Not available with "MT", or with mogul base units (070HP, 170DHP, 15AHP, 175MH/PM)                                                                                                                                                  |  | —                                                                                     |  | —                                                                                     | —                                                                                     |
| <b>LL</b>              | Latch lock safety clip                                                                                                                                                                                                                                                                 | —                                                                                   | —                                                                                     |  | —                                                                                     | —                                                                                     |
| <b>LP</b>              | Loop, (.75") male (Order LP-PT for ELE)                                                                                                                                                                                                                                                |  |  |  |  |  |

**S** Standard - Standard product features Option - Product options are factory installed**A** Accessory - Product accessory ships separately

— Not Available

Contact your local sales rep for the most current option and accessory compatibility.

## STANDARD FEATURES, OPTIONS AND ACCESSORIES

|                                                                                                                                                                                        | Prism-pack V                                                                      |                                                                                    | Prism-pack V Enclosed                                                               |                                                                                     |                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                                                                                                                        |  |  |  |  |  |
| Luminaire                                                                                                                                                                              | PP5K                                                                              | PV                                                                                 | KE                                                                                  | EK                                                                                  | EGN                                                                                 |
| <b>PECHAINX</b> Safety chain. Insert "3", "6", or "10" for "X" in catalog number.                                                                                                      | —                                                                                 | —                                                                                  | ⊙                                                                                   | —                                                                                   | —                                                                                   |
| <b>PHCB</b> Power-hook cord for 120, 208, 240, 277 and 347 volt, MA, MB, MC and MD. Includes PF-105-B. Available with "P" mount only. Not available with "MT". (Order PHCB-PT for ELE) | ⊙                                                                                 | ⊙                                                                                  | ⊙                                                                                   | ⊙                                                                                   | —                                                                                   |
| <b>PHCB-L8-480</b> Power-hook cord for 480 volt. Available with "P" mount only.                                                                                                        | ⊙                                                                                 | ⊙                                                                                  | ⊙                                                                                   | ⊙                                                                                   | —                                                                                   |
| <b>PF-104</b> Hook, (.75") male. Available with "P" mount only.                                                                                                                        | —                                                                                 | ⊙                                                                                  | —                                                                                   | —                                                                                   | ⊙                                                                                   |
| <b>PF-105</b> Cast malleable iron loop assembly, (.75") male                                                                                                                           | ⊙                                                                                 | ⊙                                                                                  | ⊙                                                                                   | ⊙                                                                                   | —                                                                                   |
| <b>PF-121</b> Cast malleable iron safety hook assembly, (.75") male                                                                                                                    | ⊙                                                                                 | ⊙                                                                                  | ⊙                                                                                   | ⊙                                                                                   | —                                                                                   |
| <b>PF-129</b> Anti-rotational hook, (.75") male. Available with "P" mount only.                                                                                                        | ⊙                                                                                 | ⊙                                                                                  | ⊙                                                                                   | ⊙                                                                                   | ⊙                                                                                   |
| <b>PF-291</b> Safety hook (.75") male. Available with "P" mount only.                                                                                                                  | ⊙                                                                                 | ⊙                                                                                  | ⊙                                                                                   | ⊙                                                                                   | —                                                                                   |
| <b>PS</b> HPS protected starter. (HPS only)                                                                                                                                            | ⊙                                                                                 | ⊙                                                                                  | ⊙                                                                                   | ⊙                                                                                   | —                                                                                   |
| <b>S</b> Single pack for the electrical assembly                                                                                                                                       | ⊙                                                                                 | —                                                                                  | ⊙                                                                                   | —                                                                                   | —                                                                                   |
| <b>TD</b> Standby lighting fixture. Tungsten-halogen lamp with time delay relay. Not applicable with "EM", "ER", or "65". Limited to 40°C ambient.                                     | ⊙                                                                                 | —                                                                                  | —                                                                                   | —                                                                                   | —                                                                                   |
| <b>09162-X</b> Safety chain. Secures electrical and optical assembly. 3' is standard length. Insert length for "X" in catalog number.                                                  | —                                                                                 | —                                                                                  | —                                                                                   | A                                                                                   | A                                                                                   |
| <b>09267</b> Wire guard for 6611 ISD SuperGlass® optics                                                                                                                                | —                                                                                 | —                                                                                  | A                                                                                   | —                                                                                   | A                                                                                   |
| <b>09268</b> Wire guard for 6612 ISD SuperGlass® optics                                                                                                                                | —                                                                                 | —                                                                                  | A                                                                                   | —                                                                                   | A                                                                                   |
| <b>09274</b> Wire guard for 6611 ISD SuperGlass® optics                                                                                                                                | A                                                                                 | A                                                                                  | —                                                                                   | —                                                                                   | —                                                                                   |
| <b>09275</b> Wire guard for 6612 ISD SuperGlass® optics                                                                                                                                | A                                                                                 | A                                                                                  | —                                                                                   | —                                                                                   | —                                                                                   |
| <b>F1</b> Single fuse assembly. (LINE-to-LINE 240/277 volt)                                                                                                                            | —                                                                                 | —                                                                                  | —                                                                                   | —                                                                                   | A                                                                                   |
| <b>F2</b> Double fuse assembly. (LINE-to-COM 208/240 volt)                                                                                                                             | —                                                                                 | —                                                                                  | —                                                                                   | —                                                                                   | A                                                                                   |
| <b>HOOK455</b> Safety hook, (.75") DN20NPT male                                                                                                                                        | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>LAMP</b> Appropriate HID lamp                                                                                                                                                       | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | A                                                                                   |
| <b>LOOP456</b> Loop, (.75") DN20NPT male                                                                                                                                               | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>PECHAINX-ACC</b> Safety chain. Insert "3", "6", or "10" for "X" in catalog number.                                                                                                  | —                                                                                 | —                                                                                  | A                                                                                   | —                                                                                   | —                                                                                   |
| <b>PF-105-B</b> Cast malleable iron loop assembly, (.75") male                                                                                                                         | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>PF-116-A</b> Cast malleable iron loop, (.75") female                                                                                                                                | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>PF-121-A</b> Cast malleable iron safety hook assembly, (.75") male                                                                                                                  | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>PF-122-A</b> Safety hook assembly, (.75") female                                                                                                                                    | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>PF-129-A</b> Anti-rotational hook, (.75") male                                                                                                                                      | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>PF-291</b> Universal gasketed hook, (.75") male                                                                                                                                     | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>PS-50</b> Replacement protected starter for 150 and less watt HPS                                                                                                                   | A                                                                                 | —                                                                                  | A                                                                                   | —                                                                                   | —                                                                                   |
| <b>PS-100</b> Replacement protected starter for 200 - 400 watt HPS                                                                                                                     | A                                                                                 | —                                                                                  | A                                                                                   | —                                                                                   | —                                                                                   |
| <b>PS-1000</b> Replacement protected starter for "C10HP"                                                                                                                               | —                                                                                 | A                                                                                  | —                                                                                   | A                                                                                   | —                                                                                   |
| <b>UPH-35-XXX-WH</b> Thru-way power-hook. Available with "P" mounting only. Not available with "ER" or "MT"                                                                            | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>UPH-35-L8-480-WH</b> 480V Thru-way power-hook. Available with "P" mounting only.                                                                                                    | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>UPH-36-XXX-WH</b> Pendant power-hook. Available with "P" mounting only. Not available with "ER" or "MT"                                                                             | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |
| <b>UPH-36-L8-480-WH</b> 480V Pendant power-hook. Available with "P" mounting only.                                                                                                     | A                                                                                 | A                                                                                  | A                                                                                   | A                                                                                   | —                                                                                   |

**S** Standard - Standard product features

**⊙** Option - Product options are factory installed

**A** Accessory - Product accessory ships separately

— Not Available

Contact your local sales rep for the most current option and accessory compatibility.